
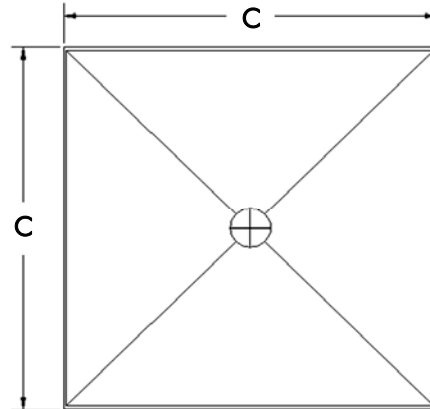


FLEXSHADE® Quartet™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
 - ✘ Hot Zinc & Powder Coated Steelwork.
(Alternative Stainless Steel Support Frame)
 - ✘ Stainless Steel Cables & Fittings.
 - ✘ Controlled Water Drainage Links.
 - ✘ Minimal Footings for Area Covered.
 - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

Quartet™ Curtain Series

Square Module Quartet**C*

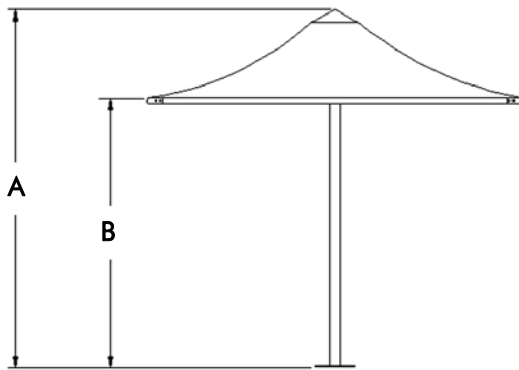


Min Edge Member Size: 50 x 50mm

SHIPPING

TYPE	*A	*B	*C	DIMENSIONS	WEIGHT
Quartet *8C	3085	2400	2500	2850 x 420 x 420 mm	125 kg
Quartet *10C	3270	2400	3275	3100 x 420 x 420 mm	145 kg
Quartet *14C	3575	2400	4275	3100 x 420 x 420 mm	182 kg
Quartet *5MC	3825	2400	5000	3100 x 525 x 525 mm	268 kg

Quartet™ C - Links

Flexshade® Quartet™ C modules can be connected to provide weatherproof cover.

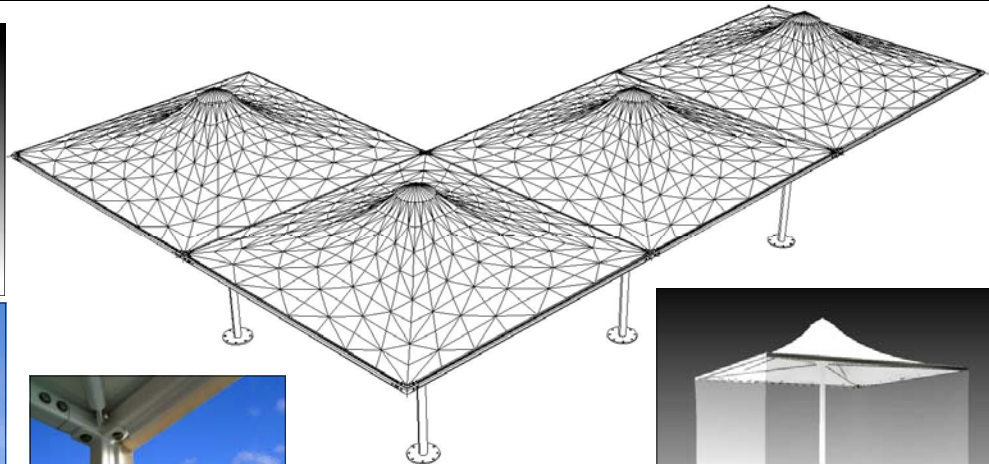

Flexshade® Quartet**C*™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of TENSION SPAN STRUCTURES PTY LTD ABN 20 050 400 836
62 Commercial Road, Fortitude Valley, Queensland, Australia 4006
Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252
Email: sales@flexshade.com Web: www.flexshade.com



Technical Specifications Quartet™ Range


Q*8C, Q*10C, Q*14C, Q*5MC SQUARE

Wind Rating : 45m/sec (100mph)
Exposure B to ASCE 7-98


Point Load : 1kN (225lbf) at Corner

Snow Load : 0.95 KPa (20 psf)
Ground Snow Load

Plan Areas : Q*8C - 5.3 sq.m (57 sq.ft)
Q*10C- 8.9 sq.m (96 sq.ft)
Q*14C- 5.0 sq.m (162 sq.ft)
Q*5MC- 22.3 sq.m (239 sq.ft)

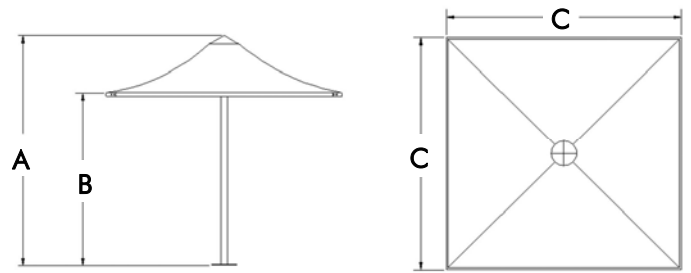

TYPE	A	B	C
Q*8C	3085 mm 10' 1"	2400 mm 7' 10"	2500 mm 8' 2"
Q*10C	3270 mm 10' 8"	2400 mm 7' 10"	3275 mm 10' 9"
Q*14C	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'
Q*5MC	3825 mm 12' 6"	2400 mm 7' 10"	5000 mm 16' 5"

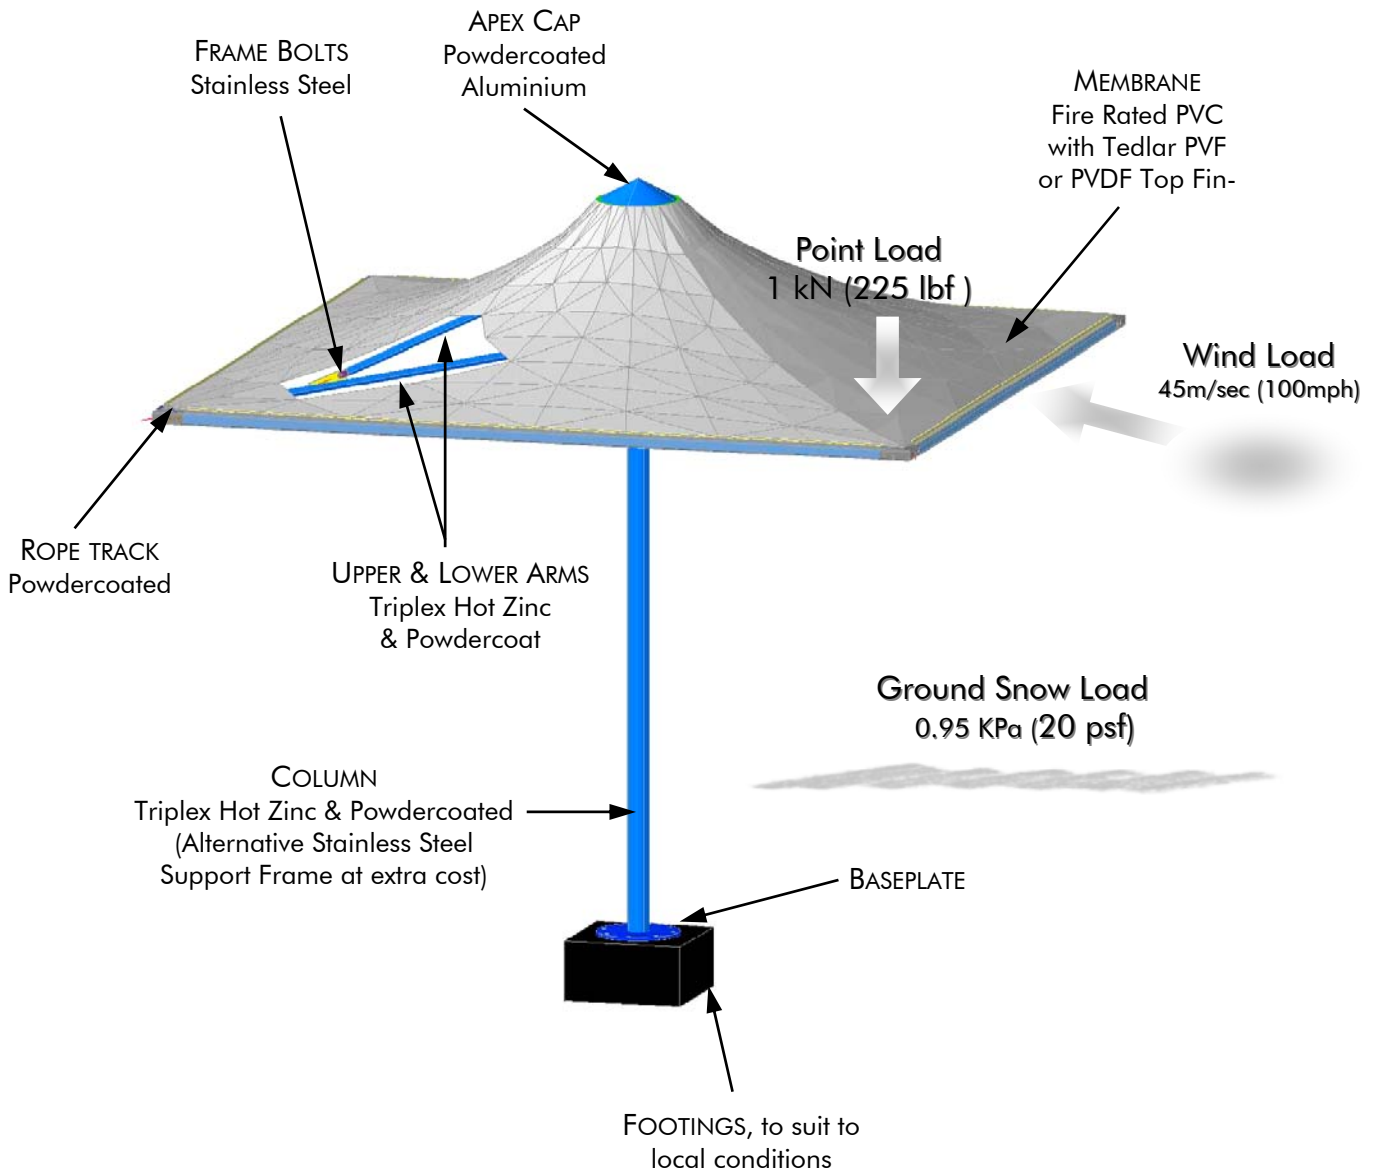

Flexshade® Quartet*C™ can be designed to suit specific customer requirements for height and plan dimension.