



# FLEXSHADE® Quartet®

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Controlled Water Drainage Links.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

## Quartet® "S" Model

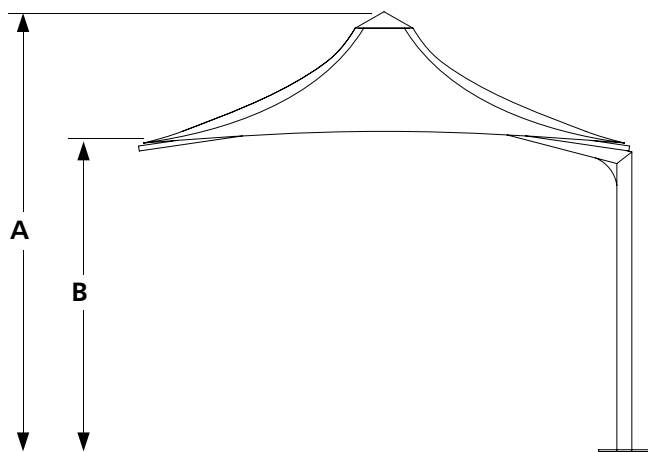

## Square Module Quartet®

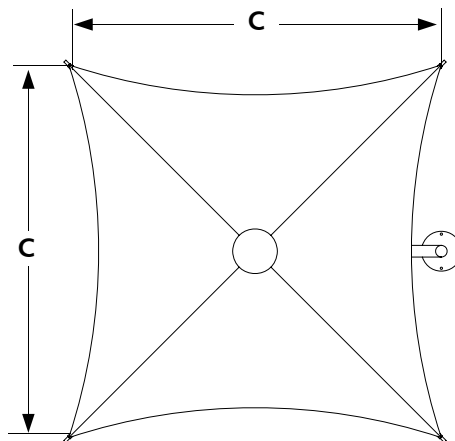

### SHIPPING

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8	3085	2400	2550	2850 x 420 x 420 mm	141 kg
Quartet *10	3270	2400	3275	3100 x 420 x 420 mm	164 kg
Quartet *14	3575	2400	4275	3100 x 420 x 420 mm	206 kg
Quartet *5M	3825	2450	5000	3100 x 525 x 525 mm	303 kg

Flexshade® Quartet® can be designed to suit specific customer requirements for height and plan dimension.



An Activity of TENSION SPAN STRUCTURES PTY LTD ABN 20 050 400 836  
 62 Commercial Road, Fortitude Valley, Queensland, Australia 4006  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com