



# Technical Specifications Quartet® Range


## Q\*8, Q\*10, Q\*14, Q\*5M SQUARE

**Wind Rating :** 45m/sec (100mph)  
W45 to AS1170.2  
(Exposure B to ASCE 7-98)


**Point Load :** 1KN (225lbf) at Corner

**Snow Load :** 0.95 KPa (20 psf)  
Ground Snow Load

**Plan Areas :** Q\*8 - 5.3 sq.m (57 sq.ft)  
Q\*10 - 8.9 sq.m (96 sq.ft)  
Q\*14 - 15 sq.m (162 sq.ft)  
Q\*5M- 22.3 sq.m (239 sq.ft)

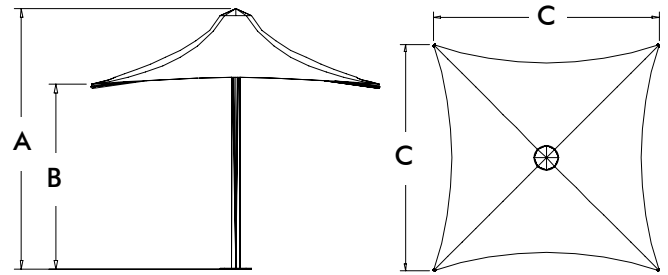

TYPE	A	B	C
Q*8	2785 mm 9' 2"	2100 mm 6' 11"	2500 mm 8' 2"
Q*10	2970 mm 9' 9"	2100 mm 6' 11"	3275 mm 10' 9"
Q*14	3275 mm 10' 9"	2100 mm 6' 11"	4275 mm 14'
Q*5M	3525 mm 11' 7"	2200 mm 7' 3"	5000 mm 16' 5"

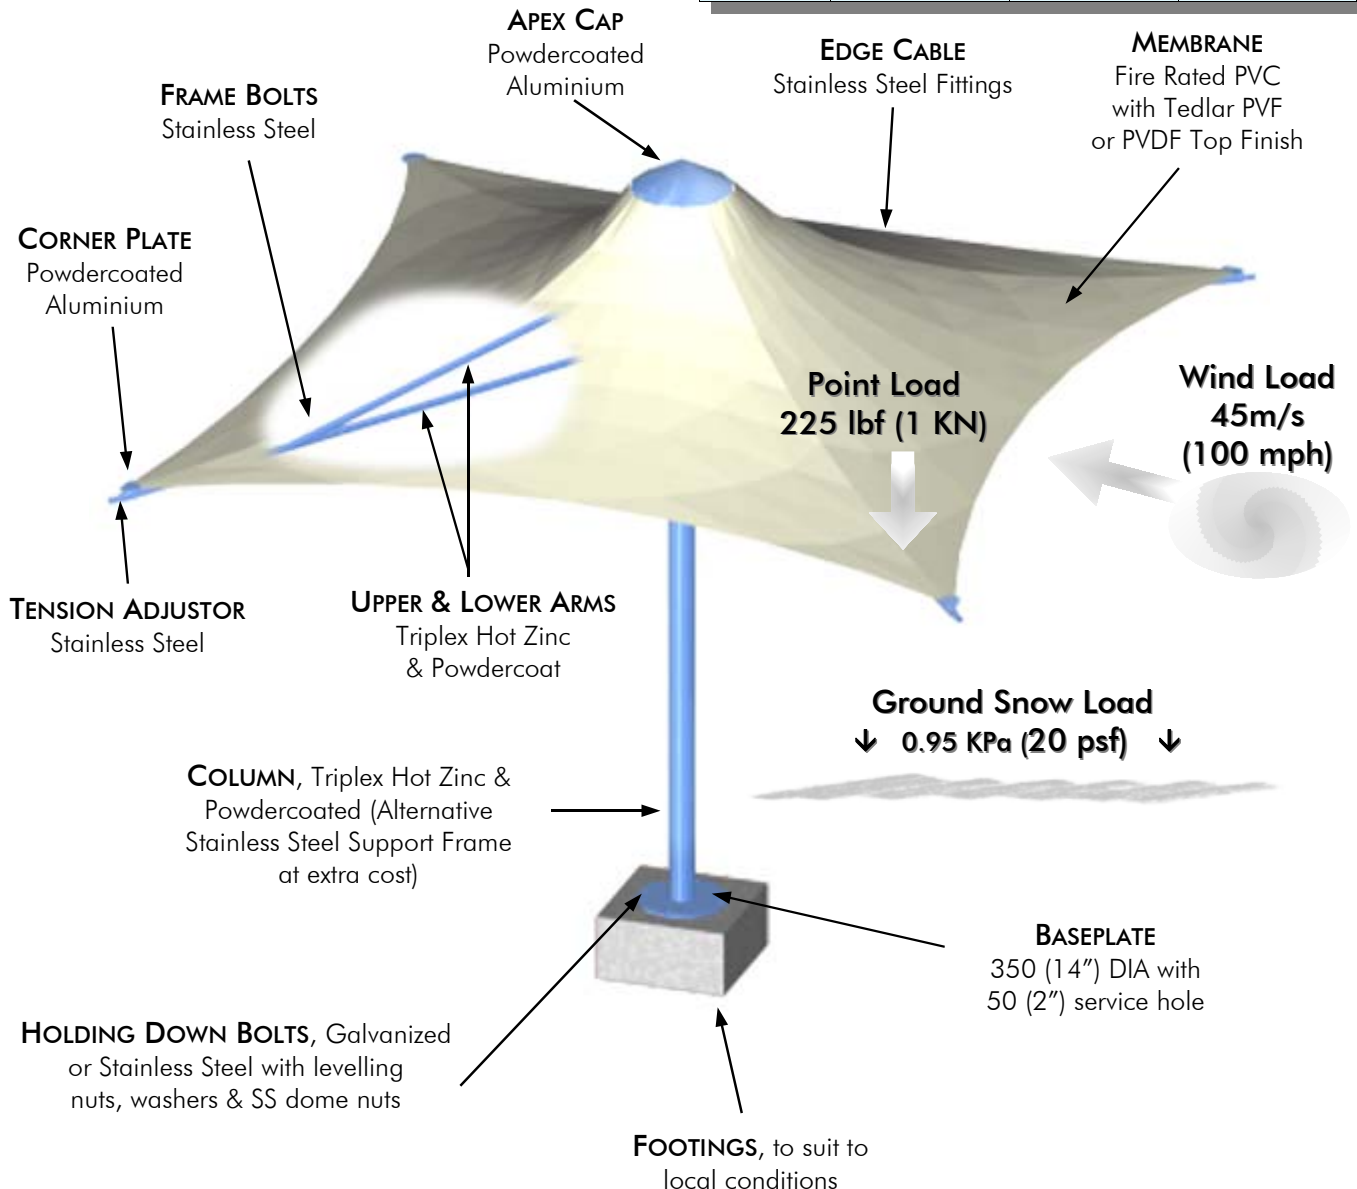

*Flexshade® Quartet® can be designed to suit specific customer requirements for height and plan dimension.*