



FLEXSHADE®

Hexagonal™


- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
 - ✘ Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
 - ✘ Stainless Steel Cables & Fittings.
 - ✘ Controlled Water Drainage Links.
 - ✘ Minimal Footings for Area Covered.
 - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

Hexagonal™ Series

Hexagonal Module™ 12, 16, 19

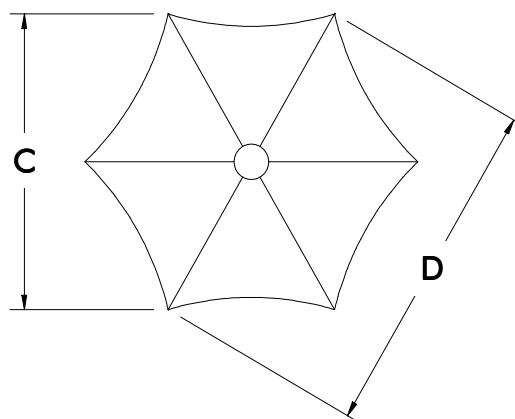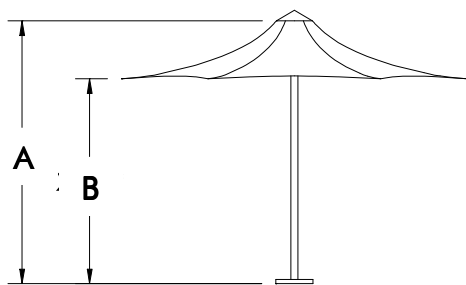

TYPE	*A	*B	*C	*D	SHIPPING	
					DIMENSIONS	WEIGHT
Flexshade *12	2695	2100	3032	3500	2875 x 420 x 450 mm	140 kg
Flexshade *16	3000	2100	4218	4870	2875 x 420 x 450 mm	182 kg
Flexshade *19	3135	2100	5022	5800	2875 x 420 x 450 mm	325 kg

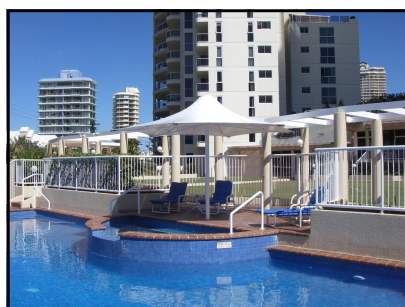

Flexshade® Hexagonal™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836
62 Commercial Road, Fortitude Valley, Queensland, Australia 4006
Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252
Email: sales@flexshade.com Web: www.flexshade.com



Technical Specifications Hexagon™ Range


HEXAGONAL™ - F*12, F*16, F*19

Wind Rating : 100mph (45m/sec)
W45 to AS1170.2
Exposure B to ASCE 7-98


Point Load : 1kN (225lbf) at Corner

Snow Load : 1.43 Kpa (30 psf)
Ground Snow Load

Plan Areas : F*12 - 7.8 sq.m (84 sq.ft)
F*16 - 14 sq.m (150 sq.ft)
F*19 - 19 sq.m (205 sq.ft)

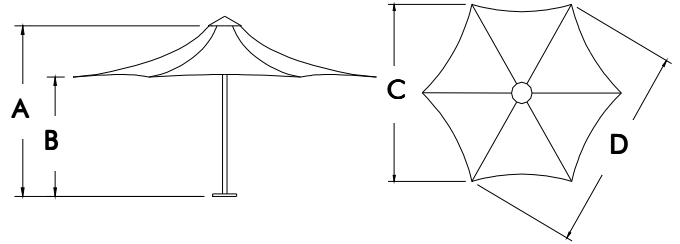

TYPE	A	B	C	D
F*12	2695 mm 8' 10"	2100 mm 6' 10"	3032 mm 9' 11"	3500 mm 11' 5"
F*16	3000 mm 9' 10"	2100 mm 6' 10"	4218 mm 13' 10"	4870 mm 15' 11"
F*19	3135 mm 10' 3"	2100 mm 6' 10"	5022 mm 16' 5"	5800 mm 19'

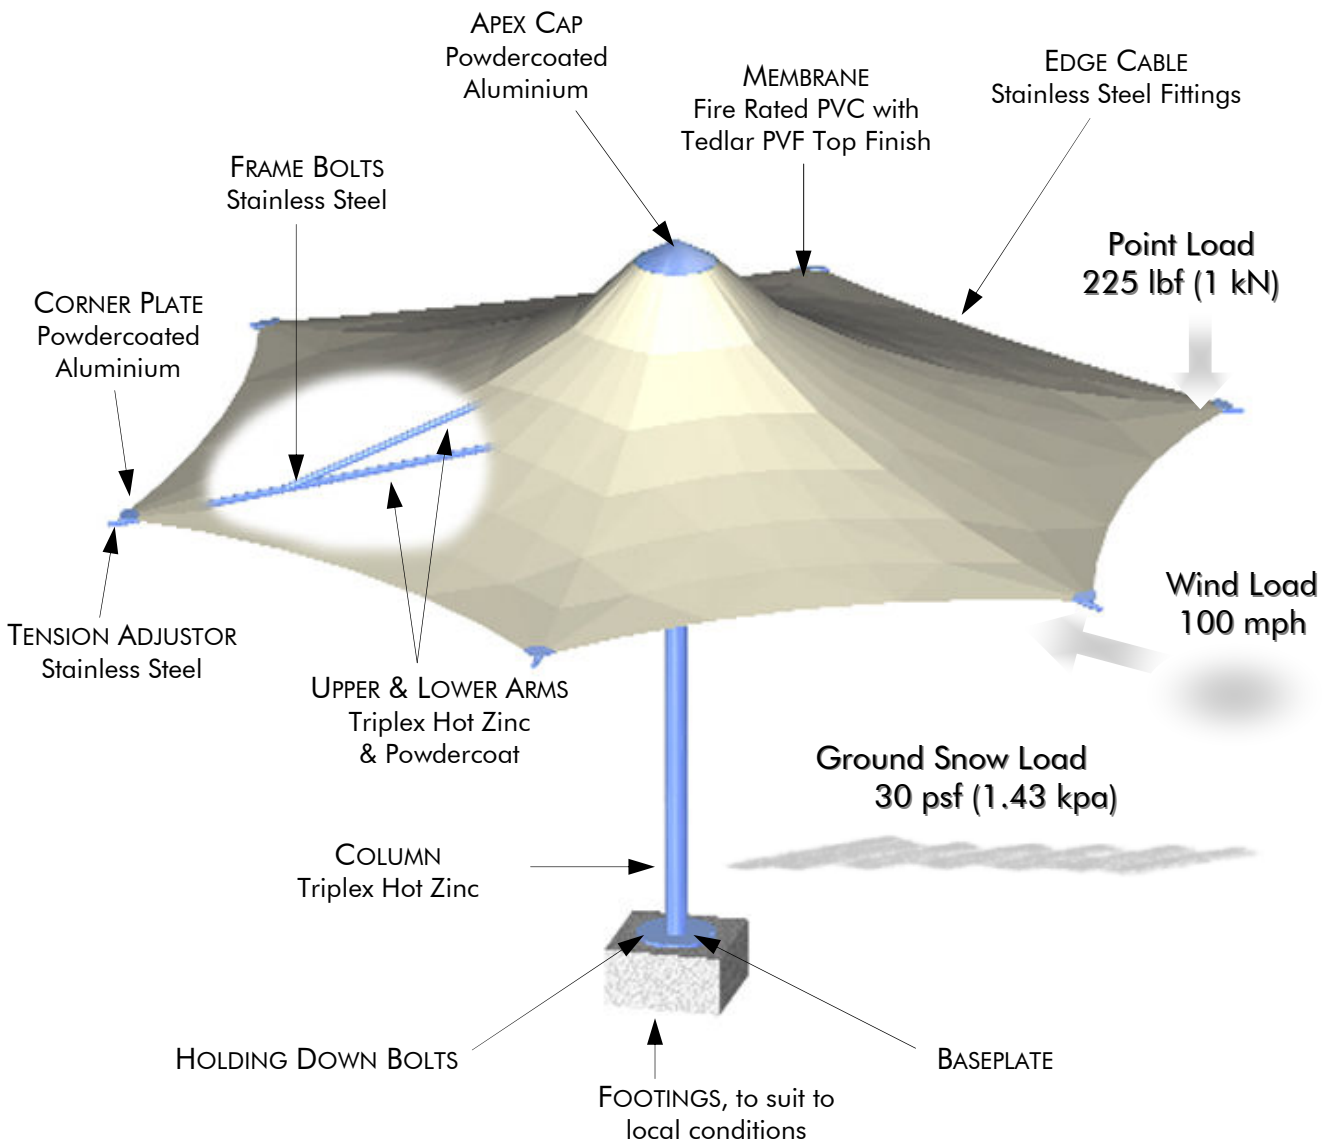

Flexshade® can be designed to suit specific customer requirements for height and plan dimension.