
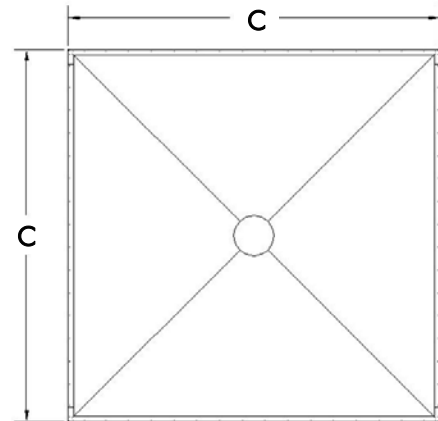


FLEXSHADE® Quartet™

- Features:**
- ✧ Acrylic or Tedlar® PVC/Polyester Membrane.
 - ✧ Hot Zinc & Powder Coated Steelwork.
(Alternative Stainless Steel Support Frame)
 - ✧ Stainless Steel Cables & Fittings.
 - ✧ Controlled Water Drainage Links.
 - ✧ Minimal Footings for Area Covered.
 - ✧ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

Quartet™ Cantilever Curtain Series

Square Module Quartet*CS


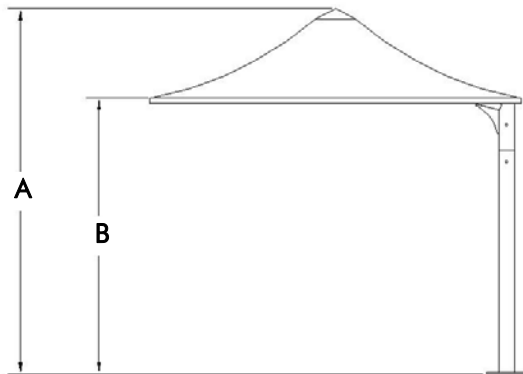


Min Edge Member Size: 50 x 50mm

SHIPPING

TYPE	*A	*B	*C	DIMENSIONS	WEIGHT
Quartet *8CS	3085	2400	2500	2850 x 420 x 420 mm	125 kg
Quartet *10CS	3270	2400	3275	3100 x 420 x 420 mm	145 kg
Quartet *14CS	3575	2400	4275	3100 x 420 x 420 mm	182 kg
Quartet *5MCS	3825	2400	5000	3100 x 525 x 525 mm	268 kg

Quartet™ CS - Links Flexshade® Quartet™ CS modules can be connected to provide weatherproof cover.

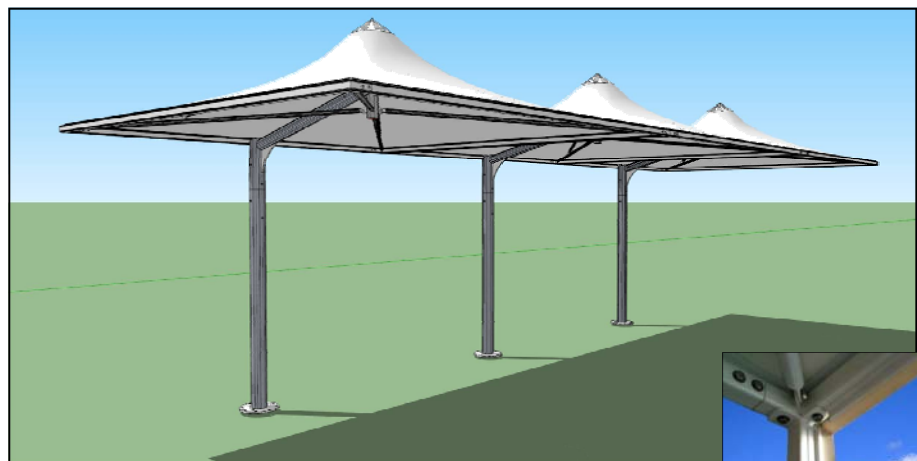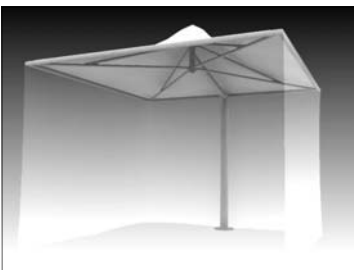

Flexshade® Quartet*CS™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836
 62 Commercial Road, Fortitude Valley, Queensland, Australia 4006
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252
 Email: sales@flexshade.com Web: www.flexshade.com