



# Technical Specifications Quartet™ Range


**Q\*8, Q\*10, Q\*14, Q\*5M, Q\*6M SQUARE**

**Wind Rating** : 45m/sec (100mph)  
Exposure B to ASCE 7-98


**Point Load** : 1kN (225lbf) at Corner

**Snow Load** : 0.95 kPa (20 psf )  
Ground Snow Load

**Plan Areas** : Q\*8 - 5.3 sq.m (57 sq.ft)  
Q\*10 - 8.9 sq.m (96 sq.ft)  
Q\*14 - 15.0 sq.m (162 sq.ft)  
Q\*5M - 22.3 sq.m (239 sq.ft)  
Q\*6M - 31.6 sq.m (340 sq.ft)

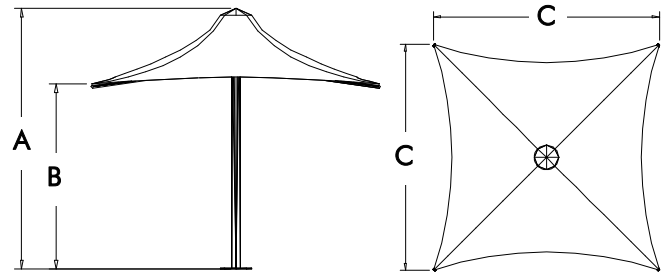

TYPE	A	B	C
Q*8	2785 mm 9' 2"	2100 mm 6' 11"	2500 mm 8' 2"
Q*10	2865 mm 9' 5"	2100 mm 6' 11"	3275 mm 10' 9"
Q*14	3275 mm 10' 9"	2100 mm 6' 11"	4275 mm 14'
Q*5M	3615 mm 11' 10"	2250 mm 7' 5"	5000 mm 16' 5"
Q*6M	4045 mm 13' 3"	2400 mm 7' 10"	6000 mm 19' 8"

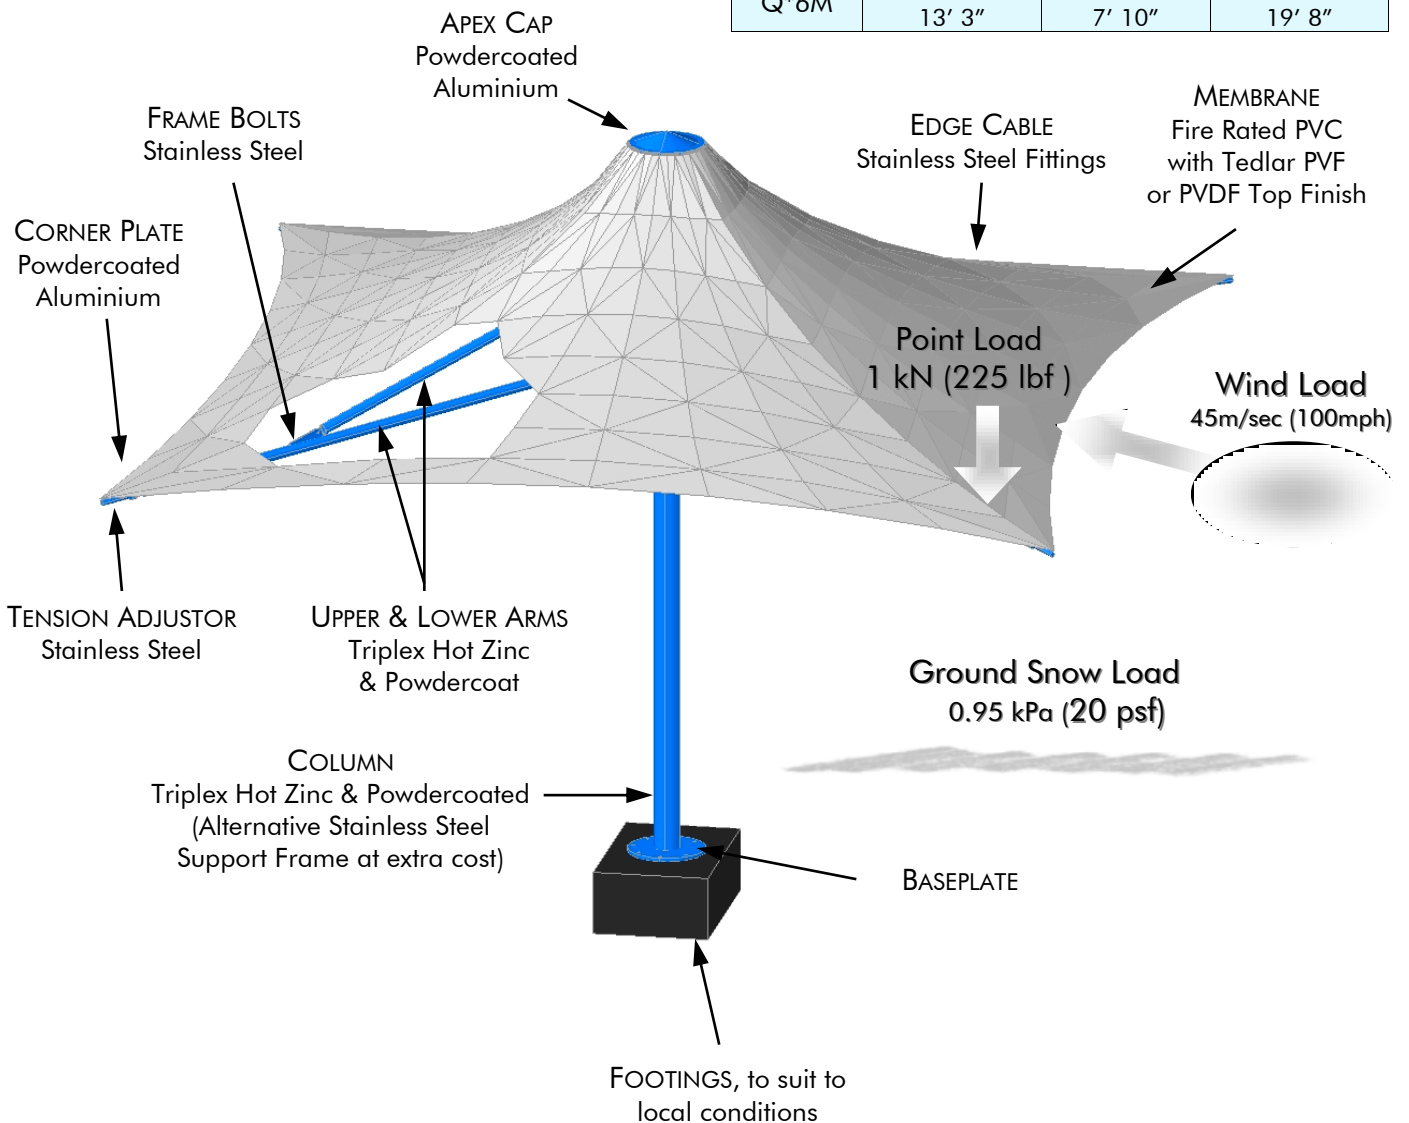

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.