
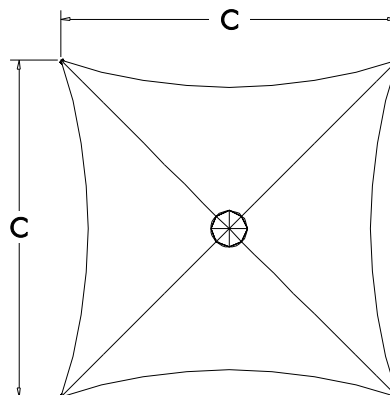


FLEXSHADE® Quartet™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
 - ✘ Hot Zinc & Powder Coated Steelwork.
(Alternative Stainless Steel Support Frame)
 - ✘ Stainless Steel Cables & Fittings.
 - ✘ Controlled Water Drainage Links.
 - ✘ Minimal Footings for Area Covered.
 - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

Quartet™ Series




Square Module Quartet

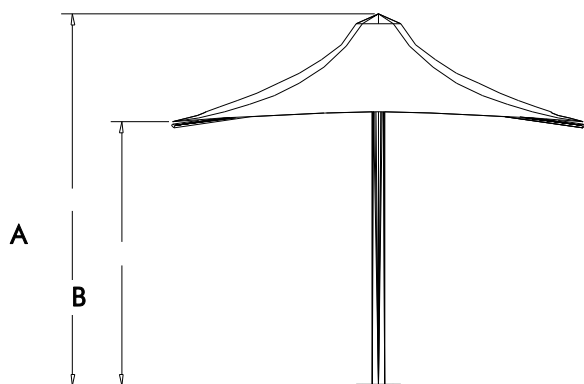

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8	2785	2100	2550	3010 x 420 x 475 mm	125 kg
Quartet *10	2865	2100	3275	3010 x 420 x 475 mm	145 kg
Quartet *14	3275	2100	4275	3010 x 420 x 475 mm	182 kg
Quartet *5M	3615	2250	5000	3300 x 420 x 475 mm	268 kg
Quartet *6M	4045	2400	6000	4125 x 420 x 475 mm	327kg

Quartet™ Links

Flexshade® Quartet™ modules can be connected to provide weatherproof cover.

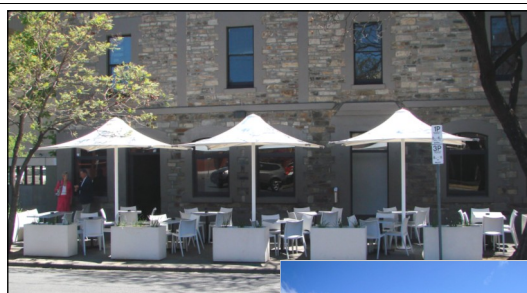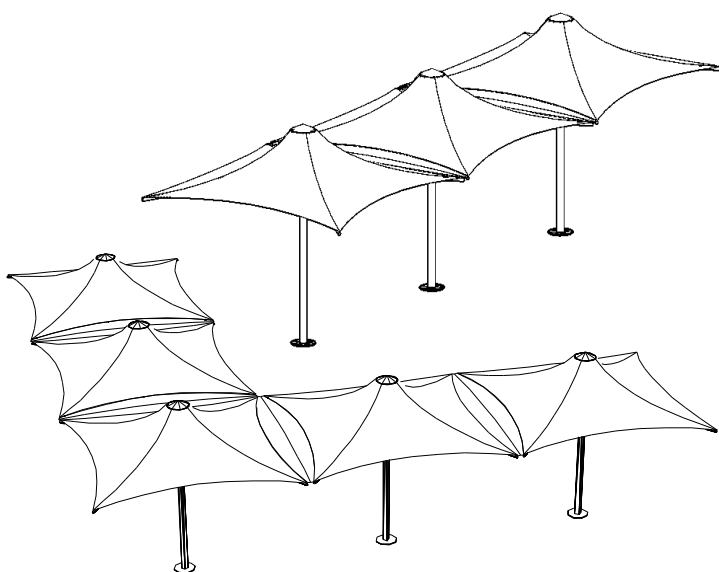

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of TENSION SPAN STRUCTURES PTY LTD ABN 20 050 400 836
 62 Commercial Road, Fortitude Valley, Queensland, Australia 4006
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252
 Email: sales@flexshade.com Web: www.flexshade.com